

AUTOMATIC^{oi*}**UVIR Flame Detector
X5200****DESCRIPTION**

Y E A R

3

WARRANTY

The evolution continues with the new X5200 UVIR Flame Detector. The X5200 combines the technologies used in the X2200 and X9800 to provide unparalleled detection capabilities and immunity to extraneous sources, combined with a superior mechanical design. The mounting arrangement allows the UV and IR sensors to

monitor the same hazardous location with a 90 degree cone of vision. When both sensors simultaneously detect the presence of a flame, an alarm signal is generated. The detector has Division and Zone explosion-proof ratings and is suitable for use in indoor and outdoor applications.

The standard output configuration includes fire, fault and auxiliary relays. An optional 4 to 20 mA output can be provided in addition to the three relays. A model with pulse output is available for easy retrofitting into existing Det-Tronics controller based systems. Auxiliary relay and 4 to 20 mA output are not available with the pulse model. A tricolor LED on the detector faceplate indicates detector status condition.

The X5200 housing is available in aluminum or stainless steel, with NEMA 4X and IP66 rating.

Typical applications include:

- Munitions
- Petrochemical applications
- Turbines.

***oi** is Detector Electronics' Trademark for its patented Optical Integrity Systems, U.S. Patent 3,952,196, United Kingdom Patent 1,534,969, Canada Patent 1,059,598.

FEATURES

- FM 3260 (2000).
- ATEX Directive Compliant.
- New patented signal processing, TDSA, Arc.
- A new level of false alarm rejection.
- Responds to a fire in the presence of modulated blackbody radiation (i.e. heaters, ovens, turbines) without false alarm.
- High speed capability.
- Microprocessor controlled heated optics for increased resistance to moisture and ice.
- Automatic, manual or magnetic optical integrity (**oi**) testing — no external test lamp required.
- Easily replaceable **oi** plate.
- Fire, fault and auxiliary relays standard.
- MODBUS RS-485 communication.
- 4 to 20 mA isolated output (optional).
- Pulse output for compatibility with controller based systems (optional).
- Tricolor LED indicates normal operation, fire and fault conditions.
- Mounting swivel allows easy sighting.
- Integral wiring compartment for ease of installation.
- Class A wiring per NFPA-72.
- Meets NFPA-33 response requirement for under 0.5 second (available when model selected).
- RFI and EMC Directive Compliant.
- Built-in data logging / event monitoring.

SPECIFICATIONS

Operating Voltage	24 vdc. Operating range is 18 to 30 vdc.
Power Consumption	2.8 watts @ 24 vdc minimum. 17.5 watts @ 30 vdc with EOL resistor installed and heater on maximum.
Relays	Contacts rated 5 amperes at 30 vdc. <u>Fire Alarm:</u> — Form C (NO and NC contacts) — normally de-energized — latching/non-latching. <u>Fault:</u> — Form A (NO contacts) — normally energized — latching/non-latching. <u>Auxiliary*:</u> — Form C (NO and NC contacts) — normally energized — latching/non-latching.
Current Output* (Optional)	4–20 mA, with a maximum loop resistance of 500 ohms from 18–19.9 vdc, 600 ohms from 20–30 vdc.
Temperature Range	<u>Operating:</u> –40°F to +167°F (–40°C to +75°C). <u>Storage:</u> –67°F to +185°F (–55°C to +85°C).
Humidity Range	0 to 95% relative humidity, can withstand 100% condensing humidity for short periods of time.
Field of View	The X5200 has a 90 degree cone of vision with the highest sensitivity lying along its central axis.
Warranty	3 years, sensor and electronics.
Enclosure Material	Copper-free aluminum or 316 stainless steel.

Response Characteristics

High Sensitivity

Fuel	Size	Distance (Feet)	Typical Response	Mode
n-Heptane	1 x 1 foot	50	Under 15 Sec.	High Arc, TDSA
Methane	32 inch plume	35	Under 10 Sec.	High Arc, TDSA

NOTE: Refer to the X5200 instruction manual (form number 95-8546) for details regarding detector response.

*Auxiliary relay and 4 to 20 mA output are not available on pulse output model.

Certification



Class I, Div. 1, Groups B, C & D;
Class II, Div. 1, Groups E, F, & G;
Class I, Div. 2, Groups A, B, C & D (T3);
Class II, Div. 2, Groups F & G (T3);
Class III.
NEMA/Type 4X.

Increased Safety Model

0539 (Ex) II 2 GD
EEx de IIC T5–T6 T86°C
DEMKO 02 ATEX 132195
T6 (Tamb = –55°C to +60°C).
T5 (Tamb = –55°C to +75°C).
IP66.

Flameproof Model

0539 (Ex) II 2 GD
EEx d IIC T5–T6, T86°C
DEMKO 02 ATEX 132195
T6 (Tamb = –55°C to +60°C).
T5 (Tamb = –55°C to +75°C).
IP66.

Conduit Entry Size

3/4 inch NPT or 25 mm.


Shipping Weight

(Approximate)

Aluminum: 6 pounds (2.7 kg).
Stainless Steel: 10 pounds (4.5 kg).

Dimensions

Dimensions shown in inches (centimeters).

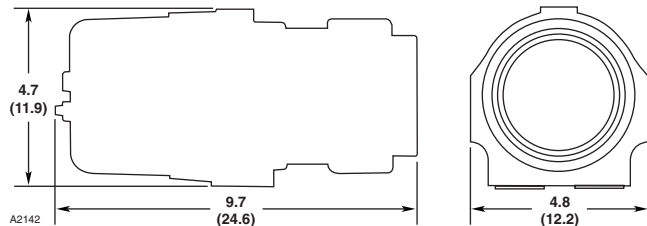

Wiring

12 AWG (2.5 mm²) to 22 AWG (0.3 mm²) shielded cable recommended.

9	4-20 mA +	19	4-20 mA –	SPARE	29
8	4-20 mA + REF	18	4-20 mA – REF	SPARE	28
7	COM FIRE	17		COM AUX	27
6	N.O. FIRE	16		N.O. AUX	26
5	N.C. FIRE	15		N.C. AUX	25
4	COM FAULT	14		RS-485 A	24
3	N.O. FAULT	13		RS-485 B	23
2	24 VDC +	12		MAN Oi	22
1	24 VDC –	11		24 VDC –	21

Wiring Terminal Identification for Standard X5200



Detector Electronics Corporation

6901 West 110th Street • Minneapolis, Minnesota 55438 USA

Operator: (952) 941-5665 or (800) 765-FIRE

Customer Service: (952) 946-6491 • Fax (952) 829-8750

http://www.detronics.com • E-mail: detronics@detronics.com

